
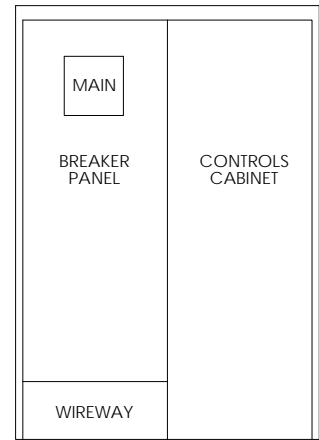
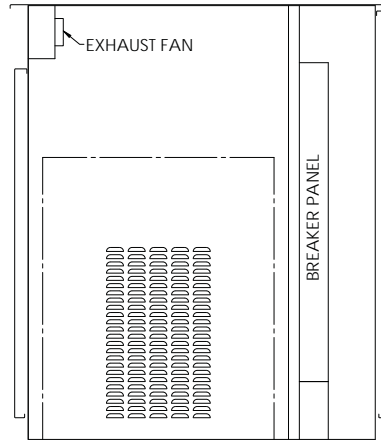


This unit substation is designed to provide step-down power for areas such as campgrounds, marinas and other facilities requiring portable power applications. Multiple receptacle configurations are available. This unit is for use in single phase applications from 600V feed.

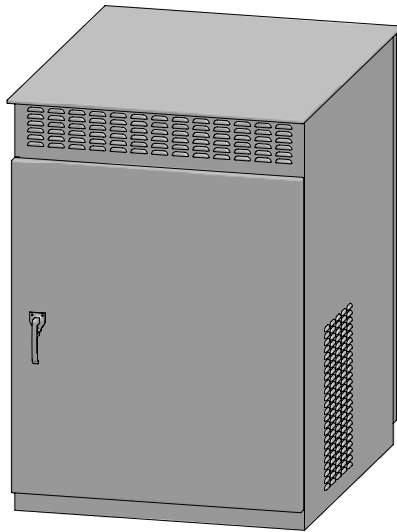

Features/Specifications

- Steel construction
- Removeable lifting ears
- Powder coated ASA 61 Grey
- NEMA 3R rated
- Padlockable 3-point latch mechanism on distribution door
- Louvers with bug screens
- Deadfront wireways (conduit extensions not required)
- Customer specified breaker panel
- Single phase units
- Main breaker panel
- General purpose distribution transformer
- Fan cooled

Options

- Stainless steel or aluminum construction
- Sub breakers as required
- Meter base
- Heater and thermostat
- Cooling fan with controls
- Up to 22 kAIC rated breakers

PART NUMBER	HEIGHT	WIDTH	DEPTH	TRANS KVA	TRANS PRIMARY	TRANS SECONDARY	MAIN BREAKER	PANEL CCTS
ASKA1-5	36"	24"	24"	5	600V	120/240V	30A	24
ASKA1-7.5	36"	24"	24"	7.5	600V	120/240V	40A	24
ASKA1-10	36"	24"	24"	10	600V	120/240V	60A	24
ASKA1-15	36"	24"	24"	15	600V	120/240V	80A	24
ASKA1-25	48"	34"	34"	25	600V	120/240V	100A	32
ASKA1-37.5	48"	34"	34"	37.5	600V	120/240V	200A	42
ASKA1-50	48"	34"	34"	50	600V	120/240V	250A	24
ASKA1-75	48"	34"	34"	75	600V	120/240V	400A	24
ASKA1-100	60"	34"	34"	100	600V	120/240V	600A	24

CONSULT FACTORY FOR OPTIONAL SIZES AND CONFIGURATIONS

