
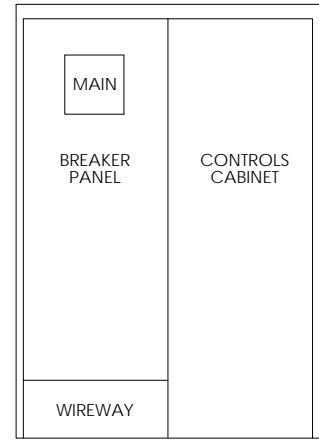
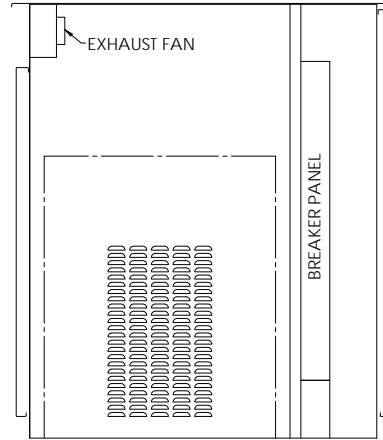


This unit substation is designed to provide step-down power for areas such as campgrounds, marinas and other facilities requiring portable power applications. Multiple receptacle configurations are available. This unit is for use in three phase applications from 600V feed.

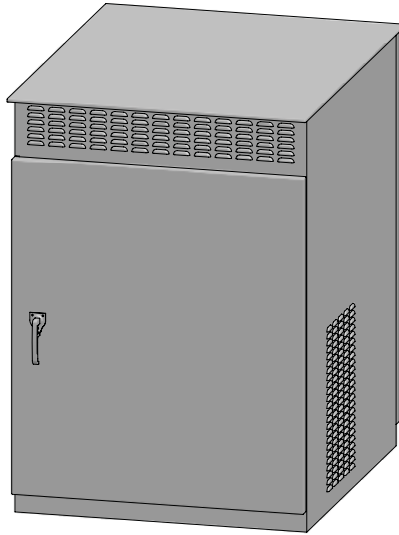

Features/Specifications

- Steel construction
- Removeable lifting ears
- Powder coated ASA 61 Grey
- NEMA 3R rated
- Padlockable 3-point latch mechanism on distribution door
- Louvers with bug screens
- Deadfront wireways (conduit extensions not required)
- Customer specified breaker panel
- Three phase units
- Main breaker panel
- General purpose distribution transformer
- Fan cooled

Options

- Stainless steel or aluminum construction
- Sub breakers as required
- Meter base
- Heater and thermostat
- Cooling fan with controls
- Up to 22 kAIC rated breakers

PART NUMBER	HEIGHT	WIDTH	DEPTH	TRANS KVA	TRANS PRIMARY	TRANS SECONDARY	MAIN BREAKER	PANEL CCTS
ASKB3-6	36"	24"	24"	6	600V	120/208V	30A	24
ASKB3-9	36"	24"	24"	9	600V	120/208V	30A	24
ASKB3-15	36"	24"	24"	15	600V	120/208V	60A	24
ASKB3-30	36"	24"	24"	30	600V	120/208V	100A	24
ASKB3-45	60"	34"	34"	45	600V	120/208V	150A	42
ASKB3-75	60"	34"	34"	75	600V	120/208V	250A	30
ASKB3-112.5	60"	34"	34"	112.5	600V	120/208V	400A	30

CONSULT FACTORY FOR OPTIONAL SIZES AND CONFIGURATIONS